

Linearized Ka/Ku-Band
**Solid State Power
Amplifier**
8 inputs, 8 outputs 20W

Linearized Ka/Ku-Band Solid State Power Amplifier

8 inputs, 8 outputs 20W



Thales AVS MIS offers a complete line of Ku-band and Ka-band Space qualified SSPA (Solid State Power Amplifier) solutions, leveraging more than 50 years of broad experience in Space Power Amplification.

Thales SSPAs provide superior features including:


- ◆ Wide band operation in Ka and Ku frequency band
- ◆ High efficiency utilizing GaN technology
- ◆ Linearized performance
- ◆ Conduction cooling
- ◆ Available with EPC or as standalone RF front end (embedded with antenna)
- ◆ TM/TC functions included
- ◆ CAN-BUS compatibility

Additional functions available include:


- ◆ Thermal compensation
- ◆ Output Power level flexibility
- ◆ Mute function
- ◆ Thermal and overdrive protections

Thales has qualified a complete library of hermetically packaged space qualified RF and TM/TC components that allow for the optimization of the SSPA design to meet your specific mission requirements.

Block diagram

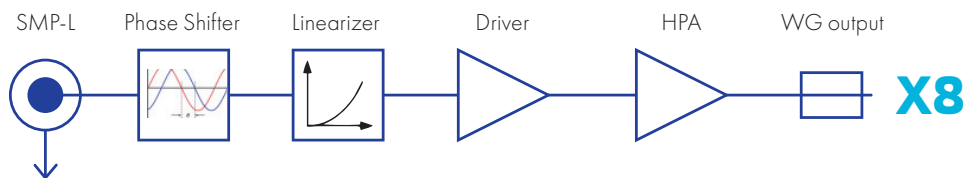

Performances curves

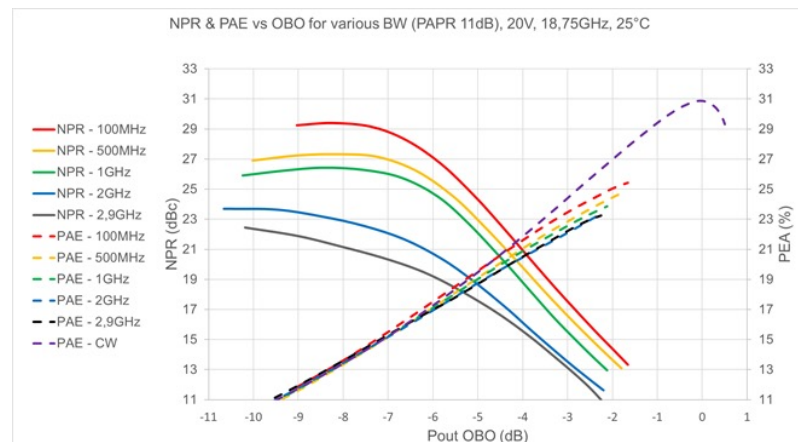

Key Features:

- ◆ SMP-Lock input
- ◆ Wave guide output

Ka-Band

- ◆ Frequency : 17.3 to 21.2GHz
- ◆ Instantaneous bandwidth: 2.9GHz
- ◆ 20W Output power @SAT / output
- ◆ >50 dB Gain

Efficiency :

- ◆ >30% @SAT without EPC
- ◆ >23% @15dB NPR with EPC

Ku-Band

- ◆ Frequency : 10.7 to 12.7GHz
- ◆ Instantaneous bandwidth: 2GHz
- ◆ 25W Output power @SAT / output
- ◆ >50 dB Gain

Efficiency :

- ◆ >35% @SAT without EPC
- ◆ >28% @15dB NPR with EPC